


UF - DIRECT BURIAL IRRIGATION WIRE

Specification: **UL493**

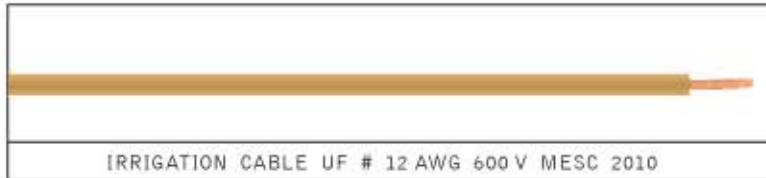

Application : Single conductor type UF wire is employed for direct burial use in commercial sprinkler and irrigation systems, Golf courses, Public parks, Plantations and commercial produce farms.

Construction

- **Conductor** : Solid annealed copper conductor as per ASTM B3.
- **Insulation** : Solid extruded PVC rated 60 ° C.

Technical Data

Working voltage	600 Volts.
Operating temperature	60 ° C
Conductor resistance	As per ASTM B 3.

Order No.	MESC CODE	Size AWG	Strand X Dia. No. X mm	Insulation Thickness mm	Approx. O. D. mm	Approx. Weight Per 2500 FT. KG.
62001	6261-01C14AWG-U0BK7-00	14	1 X 1.63	1.6	5.0	35
62002	6261 01C12AWG-U0BK7-00	12	1 X 2.05	1.6	5.4	45
62003	6261-01C10AWG-U0BK7-00	10	1 X 2.59	1.6	6.0	62

Packing: 2500 Ft. on Plywood Reels.

Colours: For other colours than Black, please replace BK in the code by "BL" for Blue, "BN" for brown, "GN" for Green, "GY" for Grey, "OR" for Orange, "PK" for Pink, "RD" for Red, "TR" for Turquoise, "VT" for Violet, "WT" for White, "YG" for Yellow/green and "YL" for Yellow.